



UNIVERSITÀ  
DEGLI STUDI  
FIRENZE

FLORE

## Repository istituzionale dell'Università degli Studi di Firenze

### **Full-range high-frequency high-efficiency class D/sup 2/ resonant power supply Proceedings of IECON'94 - 20th Annual Conference of**

Questa è la Versione finale referata (Post print/Accepted manuscript) della seguente pubblicazione:

*Original Citation:*

Full-range high-frequency high-efficiency class D/sup 2/ resonant power supply Proceedings of IECON'94 - 20th Annual Conference of IEEE Industrial Electronics / M. Bartoli; A. Reatti; M.K. Kazimierczuk. - ELETTRONICO. - 1:(1994), pp. 159-163. (Intervento presentato al convegno Industrial Electronics, Control and Instrumentation, 1994. IECON '94., 20th International Conference on) [10.1109/IECON.1994.397769].

*Availability:*

This version is available at: 2158/645174 since:

*Published version:*

DOI: 10.1109/IECON.1994.397769

*Terms of use:*

Open Access

La pubblicazione è resa disponibile sotto le norme e i termini della licenza di deposito, secondo quanto stabilito dalla Policy per l'accesso aperto dell'Università degli Studi di Firenze (<https://www.sba.unifi.it/upload/policy-oa-2016-1.pdf>)

*Publisher copyright claim:*

(Article begins on next page)

# Off-Line Full-Range High-Frequency High-Efficiency Class D<sup>2</sup> Resonant Power Supply

M. Bartoli\*, A. Reatti\*, Member, IEEE, and M. K. Kazimierczuk\*\*, Senior Member, IEEE

\*University of Florence, Department of Electronic Engineering, Via di S. Marta, 3, 50139 Florence - Italy  
Phone: (39)(55)4796-389 and Fax: (39)(55)494569; E - Mail: CIRCUITI@VM.IDG.CNR.FI

\*\*Wright State University, Department of Electrical Engineering, Dayton, Ohio 45435, USA  
Phone: (513)873-5059 and Fax: (513)873-5009; E - Mail: MKAZIM@VALHALLA.CS.WRIGHT.EDU

**Abstract** – A full-range off-line power supply based on a class D<sup>2</sup> dc-dc parallel resonant converter is presented in this paper. The class D inverter is operated above the resonant frequency to produce a zero voltage turn-on of the MOSFETs. Turn-off losses are drastically reduced by using only one capacitor connected in parallel to one of the two MOSFETs of the inverter. As a result, switching losses are nearly zero and a full-load, low line high-efficiency  $\eta = 86\%$  is achieved at an operating frequency of about 500 kHz including the front-end rectifier. The output voltage  $V_o = 12$  V is regulated over the entire load range, that is, for an output current  $I_o$  ranging from 0.25 A to 2.5 A and for both American and European standard input voltages in a narrow frequency range, from  $f_{min} = 290$  kHz to  $f_{max} = 490$  kHz. Other advantages of the power supply are its inherently short-circuit protected operation, the low  $di/dt$  at the MOSFET turn-off that allows the parasitic MOSFET diodes to be used, and the low conduction losses in ESR of the rectifier filter capacitor.

## I. INTRODUCTION

In last years, designers have been trying to increase the converter switching frequency to achieve volume and weight reduction. This results in small transformers, filter chokes, and filter capacitors. Resonant dc-dc converters represent the most promising solution to the problem of high power-density power supplies and noise level reduction. They are constituted of a resonant inverter and a rectifier coupled with a transformer that provides the galvanic insulation between the high voltage input and the low voltage output and the proper voltage transfer function by means of its turns ratio  $n$ . The reduction of switching losses makes them suitable for a high-frequency operation. Main limitations of some resonant converters are high peak currents in the inverter section and high reverse voltage across power transistors, e.g. in the class E inverter the maximum reverse voltage may be four times higher than the dc input voltage  $V_{DD}$  [1-3]. Class D resonant inverters have a low voltage stress on power transistors, equal to  $V_{DD}$ . For this reason, they can be used for applications in off-line power supplies, where the rectified dc input voltage is high, e.g.,  $V_{DD} = \sqrt{2} \times 220 \times 1.2 = 370$  V in Europe. Moreover, low cost power transistors with a low  $R_{ON}$  and low parasitic capacitances can be used and both conduction and switching losses are reduced.

Other papers [4-6] show resonant dc-dc converters operated below the resonant frequency. However, this operation requires fast

external antiparallel diodes in the inverter circuit. Moreover, only turn-off losses are eliminated. The power lost at the turn-on is simply transferred to external snubber circuits. Practically, spikes in the switch current waveforms are present at both the turn-on and turn-off.

The purpose of this paper is to present a power supply that operates over a wide-load and line range,  $I_o = 0.25 - 2.5$  A and  $V_{DD} = 100 - 370$  V, which corresponds to line ac voltage from 75 to 275  $V_{RMS}$ . Therefore, the circuit is called a full-range power supply. The power supply is composed of a parallel class D<sup>2</sup> dc-dc resonant converter [7], where switching losses are drastically reduced and, therefore, the converter is suitable for a high switching frequency ( $f_{max} = 480$  kHz) operation.

The significance of the paper is that the power supply operates with a high-efficiency operation with a low number of easily available components and, therefore, represents a satisfactory solution to the need of low-cost and high power-density power supplies.

Other advantages of the presented power supply are as follows:

- 1) The turn off losses are almost zero over the entire load range because the current in the inverter is almost load independent.
- 2) It is inherently protected against load short circuit.
- 3) a safe no-load topology is achieved if the switching frequency is kept close to the resonant frequency.
- 4) Parasitic components, as such as MOSFET parasitic diodes and capacitances, are absorbed in the circuit operation.
- 5) Low number of currently available devices can be used in assembling the power supply so that both the high power-density and low-cost requirements are satisfied.

## II. PRINCIPLE OF OPERATION

The converter circuit is obtained with a parallel resonant inverter and a class D voltage-driven center-tapped rectifier [7, 8] with one capacitor in parallel with only one power MOSFET, as shown in Fig. 1. This provides reduction of the turn-on losses in both MOSFETs. The parallel resonant inverter circuit is better than the series resonant [11,15,16] because it is able to regulate the dc output voltage  $V_o$  over a wide load range, e.g., from 10 % to 110 % of the nominal output current as normally required from design specifications. Moreover, it has an efficiency which increases with output current. The parallel class D inverter has is chosen because the series-parallel class D inverter has a lower full-load efficiency [10,15,16]. The circuit is operated at the continuous current mode

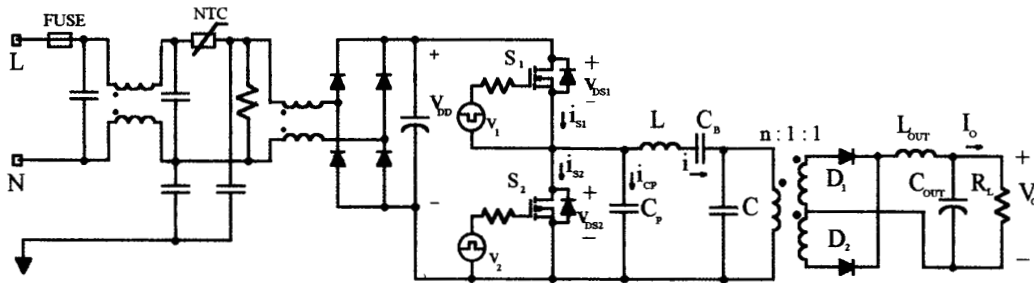


Fig. 1. Class D parallel resonant power supply.

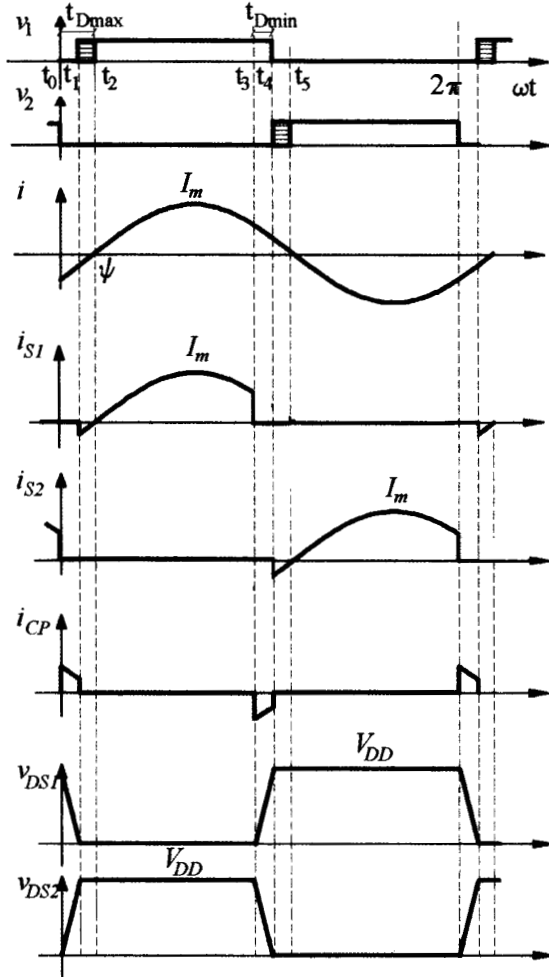


Fig. 2. Waveforms of class D inverter for  $f > f_o$  with shunt capacitor  $C_p$ .

above the resonant frequency  $f_o$  over the entire load and input voltage ranges. The principle of operation of class D inverter is explained by the waveforms shown in Fig. 2: the current in the resonant circuit is lagging the voltage applied across the switches (that is, the fundamental harmonic of the square wave applied). As

a result, turn on switching losses are eliminated because the MOSFET body-drain diodes conduct the inverse current and the voltages  $v_{DS1}$  and  $v_{DS2}$  are zero before the MOSFETs carry the forward currents (time interval  $t_1 - t_2$ ). Moreover, diodes turn on at a very low  $di/dt$ , not generating current spikes, and the conducting diodes have a turn off time equal to the forward conduction time of the MOSFETs. So the flyback diodes can be slow and no external diodes are required. The parallel capacitor  $C_p$  forces the reverse voltage across both of the MOSFETs to slowly increase during their turn-off [8]. As a result, turn-off losses are drastically reduced.

For operation above resonance ( $f > f_o$ ), MOSFET  $Q_1$  conducts during the time interval  $t_2 - t_3$ , MOSFET  $Q_2$  is OFF and the voltage  $v_{DS2}$ , which is also the voltage across  $C_p$ , is equal to the dc input  $V_{DD}$ . From time  $t_3$  to  $t_4$ , the gate-to-source voltage turns  $Q_1$  off and  $Q_2$  is still off because of the dead time  $t_D$ . After time  $t_4$ , the current of the resonant circuit is diverted from  $Q_1$  to the shunt capacitor  $C_p$ , the voltage  $v_{DS2}$  decreases according to  $i_{CP} = dv_{DS}/dt$ , and  $v_{DS1}$  is forced to increase from zero to  $V_{DD}$ . As a result,  $v_{DS1}$  slowly increases and crosses the decreasing current at almost zero level. After half a period, the voltage and current waveforms of  $Q_2$  have the same waveforms of those of  $Q_1$ ; therefore,  $Q_1$  turns on with zero power loss and turn-off loss is also reduced for  $Q_2$ .

### III. DESIGN EXAMPLE

An off-line power supply was designed to meet the following specifications:

- 1) output power  $P_o = 24$  W at an output voltage  $V_o = 12$  V;
- 2) input dc voltage  $V_{DD}$  ranging from 100 V to 370 V, that is, an ac rms voltage in the 80–240 V range;
- 3)  $f_o = 300$  kHz.

Using the results of previous analysis [7] and using a loaded quality factor  $Q = 3$ , a class D inverter efficiency  $\eta_I = 0.9$ , a diode forward drop  $V_F = 0.5$  V, a diode series resistance  $R_F = 0.03$  W, and a transformer winding resistance  $r_F = 0.1$  W, the design procedure is as follows. The dc load resistance is

$$R_L = \frac{V_o^2}{P_o} = 6 \Omega. \quad (1)$$

The dc-to-dc voltage transfer function for the center-tapped rectifier is

$$M_R = \frac{M'_R}{n} = \frac{1}{n} \frac{2\sqrt{2}}{\pi \left( 1 + \frac{V_F}{V_o} + \frac{R_F + r_F}{R_L} \right)} = \frac{0.84}{n} \quad (2)$$

where  $n$  is the transformer turns ratio. The equivalent input resistance seen at the terminals of the primary winding is

$$R_R = R_L \frac{n^2 \pi^2}{8} \left( 1 + \frac{V_F}{V_o} + \frac{R_F + r_F}{R_L} \right) = 7.87 n^2 \Omega. \quad (3)$$

If a minimum operating frequency  $f = 1.05f_o$  is assumed at full power, the dc-to-ac voltage transfer function results

$$M_I = \frac{\sqrt{2} M_{I2}}{\pi} = \frac{\sqrt{2}}{\pi} \frac{1}{\sqrt{\left[ 1 - \left( \frac{f}{f_o} \right)^2 \right]^2 + \left( \frac{1}{Q} \frac{f}{f_o} \right)^2}} = 1.23. \quad (4)$$

The rectifier efficiency at full power is

$$\eta_R = \left( 1 + \frac{V_F}{V_o} + \frac{R_F}{R_L} + \frac{r_F}{R_L} \right)^{-1} = 0.94. \quad (5)$$

The dc-to-dc voltage transfer function of the converter is

$$M = \frac{V_o}{V_{Imin}} = \sqrt{\eta_I} M_I \frac{M'_R}{n} \quad (6)$$

which leads to  $n = 8.17$ . By choosing  $n = 9$ , we obtain  $M_{I2max} = 3.01$ ,  $M_{I2min} = 0.79$ , and therefore, the maximum frequency for load regulation is

$$f_{max} = \sqrt{1 - \frac{1}{2Q^2} - \sqrt{\left( 1 - \frac{1}{2Q^2} \right)^2 + \frac{1}{|M_{I2min}|^2}} - 1} = 1.46 f_o. \quad (7)$$

The component values of the resonant circuit are calculated as follows

$$L = \frac{n^2 R_R}{2\pi f Q} = 112 \mu\text{H}. \quad (8)$$

$$C = \frac{Q}{n^2 R_R 2\pi f} = 2.5 \text{ nF}. \quad (9)$$

Hence the characteristic impedance is  $Z_o = \sqrt{L/C} = 211 \Omega$ . The maximum current through inductor  $L$  at full load operation and at maximum input voltage  $V_{DD} = 370 \text{ V}$  is calculated as

$$I_m = \frac{2V_{DDmax} M_{I2min} \sqrt{1 + \left( Q \frac{f_{max}}{f_o} \right)^2}}{\pi Z_o Q} = 1.32 \text{ A}. \quad (10)$$

The efficiency of the Class D parallel resonant inverter operated at full load with an input voltage  $V_{DD} = 100 \text{ V}$  is

$$\eta_{PI} = \frac{P_o}{P_o + P_c + P_{TOFF}} = \left\{ 1 + \frac{r_p}{R} \left[ 1 + (Qf/f_o)^2 \right] + \frac{2f \left[ 1 + (Qf/f_o)^2 \right]}{3I_m^2 R} \left[ V_I I_{IP}(t_{1P} + t_{2P}) + \frac{V_{DD} I_m \sin \psi_P t_{1P}^2}{t_{2P}} \right] \right\}^{-1} = 0.96 \quad (11)$$

where

$$r_p = \frac{r_{DS1} + r_{DS2}}{2} + r_L + r_{RESR} \frac{(Qf/f_o)^2}{(Qf/f_o)^2 + 1} + r_{BESR} = r_M + r_L + r_{BESR} \quad (12)$$

is the total equivalent parasitic resistance of a class D parallel resonant inverter,  $r_{DS1}$  and  $r_{DS2}$  are the drain-to-source resistances of the two MOSFETs when ON,  $r_L$  is the equivalent series resistance (ESR) of the resonant inductor  $L$ ,  $r_{RESR}$  is the ESR of the resonant capacitor  $C$ , and  $r_{BESR}$  is the ESR of the blocking capacitor  $C_B$ .

#### IV. EXPERIMENTAL RESULTS

A breadboard of the converter was built and tested, using two International Rectifier IRF740 MOSFETs, Motorola MBR4035CT Schottky diodes,  $C_p = 1.5 \text{ nF}$ ,  $L = 110 \text{ mH}$ ,  $C = 3.9 \text{ nF}$ ,  $C_B = 1 \text{ mF}$ ,  $L_{OUT} = 35 \text{ mH}$ , and  $C_{OUT} = 300 \text{ nF}$ . The measured resonant frequency was  $f_o = 251 \text{ kHz}$ . The driver voltages with adjustable dead time of 250 ns were implemented using a Unitorde U1825IC. The experimental results were measured as functions of the load resistance and input voltage at a fixed output voltage  $V_o = 12 \text{ V}$ . The measured output power was varied from  $P_{Omin} = 2.5 \text{ W}$  to  $P_{Omax} = 33 \text{ W}$  and the switching frequency varied from 280 kHz at  $V_{DD} = 100 \text{ V}$  and  $I_o = 2.8 \text{ A}$  to 480 kHz at  $V_{DD} = 370 \text{ V}$  and  $I_o = 0.2 \text{ A}$ . Fig. 3 shows the efficiency of the converter as a function of the output current for two values of the ac input voltage  $V_{I rms} = 100 \text{ V}$  and  $V_{I rms} = 235 \text{ V}$  at  $V_o = 12 \text{ V}$ .

Figs. 4 and 5 show the experimental voltage and current waveforms of the bottom MOSFET at  $V_{DD} = 141 \text{ V}$  and  $V_{DD} = 333 \text{ V}$  at a constant output resistance  $R_L = 4.7 \text{ W}$ . The output voltage was regulated over the entire input voltage range with a narrow frequency variation from 294 kHz to 381 kHz. Fig. 6 zooms the turn-off transition and shows that the voltage  $V_{DS2}$  and the drain current  $i_{DS2}$  cross each other at almost zero values, resulting in nearly zero turn-off loss of the MOSFET.

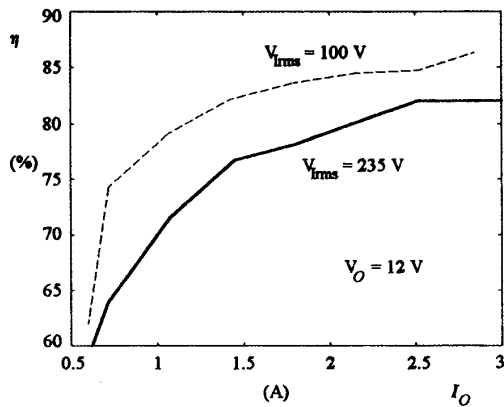


Fig. 3. Converter efficiency versus output current.

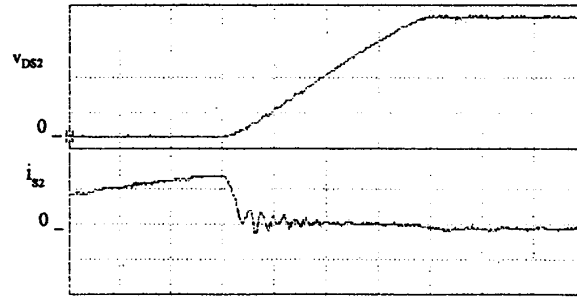


Fig. 6. Detail of voltage  $v_{DS2}$  and current at the turn-off of the MOSFET  $Q_2$ . Operating conditions are the same as in Fig. 4. Vertical: 185 V/div. for  $v_{DS2}$  and 1 A/div. for  $i_{S2}$ ; horizontal: 500  $\mu$ s/div.

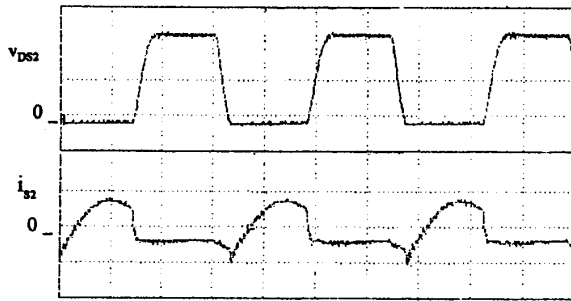


Fig. 4. Waveforms of voltage  $v_{DS2}$  and current  $i_{S2}$  at an operating frequency  $f = 294$  kHz, ac input voltage  $V_{rms} = 100$  V, output voltage  $V_O = 12$  V, and  $R_L = 4.7 \Omega$  ( $I_O = 2.5$  A). Vertical: 40 V/div. for  $v_{DS2}$  and 1 A/div. for  $i_{S2}$ ; horizontal: 1  $\mu$ s/div.

Fig. 7 shows the current waveform through the primary winding of the transformer and the output voltage ripple  $v_r$ . The current was a square wave as expected, and the peak-to-peak voltage ripple was as low as 100 mV, which is less than 1% of the output voltage.

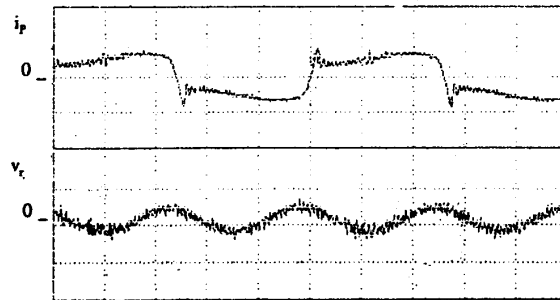


Fig. 7. Waveforms of the current  $i_p$  through the primary winding of the transformer and the output voltage ripple  $v_r$  at an operating frequency  $f = 386$  kHz, ac input voltage  $V_{rms} = 235$  V ( $V_{DD} = 235$  V), output voltage  $V_O = 12$  V, and  $R_L = 4.7 \Omega$  ( $I_O = 2.5$  A). Vertical: 500 mA/div. for  $i_p$  and 100mV/div. for  $v_r$ ; horizontal: 500 ns/div.

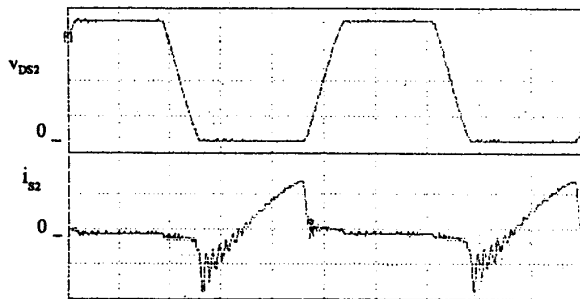


Fig. 5. Waveforms of voltage  $v_{DS2}$  and current  $i_{S2}$  at an operating frequency  $f = 382$  kHz, ac input voltage  $V_{rms} = 235$  V, output voltage  $V_O = 12$  V, and  $R_L = 4.7 \Omega$  ( $I_O = 2.5$  A). Vertical: 185 V/div. for  $v_{DS2}$  and 1 A/div. for  $i_{S2}$ ; horizontal: 500  $\mu$ s/div.

#### REFERENCES

- [1] Kazimierczuk, M. K. and X.T. Bui, "A family of class E resonant dc-dc power converters", *Proc. 16th Intern. PCI '88 Conf. (SATECH '88)*, Dearborn, MI, October 3-6, 1988, pp.383-394.
- [2] Kazimierczuk, M. K. and K. Puczek, "Power-output capability of class E amplifier at any loaded Q and switch duty cycle", *IEEE Trans. Circuits Syst.*, vol CAS-36, pp. 1142-1144, August 1989.

- [2] Kazimierczuk, M. K. and K. Puczek, " Power-output capability of class E amplifier at any loaded Q and switch duty cycle", *IEEE Trans. Circuits Syst.*, vol CAS-36, pp. 1142-1144, August 1989.
- [3] J. Jozwik and M.K. Kazimierczuk, "Analysis and design of Class E<sup>2</sup> dc-dc converter", *IEEE Trans. Ind. Electron.*, vol IE-37, pp.173-183, April 1990.
- [4] K. Schmidner, "A new high frequency resonant converter topology", *Proc. High Freq. Power Conversion Conf.*, pp.390-403, May 1988, San Diego, CA.
- [5] S.L. Smith and S. Robinson, "An off-line, one MHz 350-Watt parallel resonant converter (PRC) utilizing an RF transformer", *High Frequency Power Conversion Conference*, pp. 446-466, May 1988, San Diego, CA.
- [6] R. Myers and R.D. Peck, "200-KHz Power FET Technology in New Modular Power Supplies", *Hewlett-Packard Journal*, pp. 3-10, August 1981.
- [7] Kazimierczuk, M. K., Szaraniec, W., and Wang, S., "Analysis and design of parallel resonant converter at high Q", *IEEE Trans. Aerospace Electron. Syst.*, Vol. 28, No. 1, January 1992, pp. 35-50.
- [8] Kazimierczuk, M. K. and W. Szaraniec, "Class zero-voltage-switching inverter with only one shunt capacitor", *Proc. Inst. Elect. Eng., Pt. B, Elec. Power Appl.*, vol. 139, Nov. 1992.
- [9] M. K. Kazimierczuk, "Class D current-driven rectifiers for dc/dc converter applications", *IEEE Trans. Ind. Electron.*, vol. IE-38, pp. 344-354, Nov. 1991.
- [10] Kazimierczuk, M. K., Thirunarayan, N., and Wang, S., "Analysis of series parallel resonant converters", *IEEE Trans. Aerospace Electron. Syst.*, Vol. 29, No. 1, January 1993, pp. 88-99.
- [11] R. J. King and T. A. Stuart, "A normalized model for the half-bridge series resonant converter", *IEEE Trans. Aerospace Electron. Syst.*, vol. AES-17, pp. 190-198, Mar. 1981.
- [12] V. Vorperian and S. Cuk, "A complete dc analysis of the series resonant converter", in *IEEE Power Electron. Specialists Conf. Rec.*, Cambridge, MA, June 14-17, 1982, pp. 85-100.
- [13] Kazimierczuk, M. K. and Wang, S., "Frequency domain analysis of series converter for continuous conduction mode", *IEEE Trans. Power Electron.*, Vol. 7, No. 2, April 1992, pp. 270-279.
- [14] R. L. Steigerwald, "High-frequency resonant transistor dc-dc converter", *IEEE Trans. Power Electron.*, pp. 181-191, May 1984.
- [15] R. L. Steigerwald, "A comparison of half-bridge resonant converter topologies", *IEEE Trans. Power Electron.*, vol. PE-3, pp. 174-182, Apr. 1988.
- [16] Kazimierczuk, M. K. and W. Szaraniec, "Electronic ballast for fluorescent lamps", *IEEE Trans. Power Electron.*, Vol. PE-8, pp. 386-395, Oct. 1993.