



UNIVERSITÀ  
DEGLI STUDI  
FIRENZE

## FLORE

# Repository istituzionale dell'Università degli Studi di Firenze

### **Modal stability and Squire's theorem for an inhomogeneous viscoelastic suspension**

Questa è la Versione finale referata (Post print/Accepted manuscript) della seguente pubblicazione:

*Original Citation:*

Modal stability and Squire's theorem for an inhomogeneous viscoelastic suspension / Fusi L.; Giovinetto A.. - In: EUROPEAN JOURNAL OF MECHANICS. B, FLUIDS. - ISSN 0997-7546. - STAMPA. - 89:(2021), pp. 21-28. [10.1016/j.euromechflu.2021.05.002]

*Availability:*

The webpage <https://hdl.handle.net/2158/1237615> of the repository was last updated on 2022-01-17T16:16:21Z

*Published version:*

DOI: 10.1016/j.euromechflu.2021.05.002

*Terms of use:*

Open Access

La pubblicazione è resa disponibile sotto le norme e i termini della licenza di deposito, secondo quanto stabilito dalla Policy per l'accesso aperto dell'Università degli Studi di Firenze (<https://www.sba.unifi.it/upload/policy-oa-2016-1.pdf>)

*Publisher copyright claim:*

La data sopra indicata si riferisce all'ultimo aggiornamento della scheda del Repository FloRe - The above-mentioned date refers to the last update of the record in the Institutional Repository FloRe

(Article begins on next page)

# Modal stability and Squire's theorem for an inhomogeneous viscoelastic suspension

Lorenzo Fusi<sup>a</sup>, Antonio Giovinetto<sup>a</sup>

<sup>a</sup>*Dipartimento di Matematica e Informatica "U. Dini", Viale Morgagni 67/a, 50134 Firenze, Italy*

---

## Abstract

We study the linear stability of the Poiseuille flow of a viscoelastic upper convected Maxwell fluid in which the rheological parameters depend on the concentration of particles suspended in the fluid (dense suspension with negligible diffusion). After determining the basic flow and basic concentration profile we consider a temporal three dimensional perturbation in the form of a stream-wise and cross-wise wave. We derive the linearized perturbed equation and prove the validity of Squire's theorem, extending the result of [13] in which the theorem was proved for constant rheological parameters. We discuss the relation between the Weissenberg and the Reynolds numbers. We finally study the 2D eigenvalue problem for the case of constant coefficients and for non-constant coefficients with low Weissenberg number. We solve the problem numerically by means of a spectral collocation method and we plot the marginal stability curves discussing how stability depends on the fluid rheology.

*Keywords:* Dense suspension, Viscoelastic fluid, Linear Stability, Neutral stability curves

---

## 1. Introduction

One of the first investigation on the rheology of suspensions is probably the pioneering work of Einstein [3] on the viscosity of a hard sphere suspension at low concentration. Since then the rheological behavior of suspensions has attracted

---

\*Corresponding author: lorenzo.fusi@unifi.it

5 the interest of a considerable number of scientists and many studies have been  
carried out to investigate the characteristics of these materials. Many papers  
have focussed on highly-concentrated (or dense) suspensions, where the mean  
distance between particles is less than the average particle size, [12]. Others  
are concerned with the so-called dilute or semi-dilute suspensions, where the  
10 attraction between particles is negligible and the system is essentially governed  
by hydrodynamic forces and Brownian diffusion, [1].

Suspensions are of great importance in many applications such as biochemical  
systems (blood), industrial products (paints, foams) and industrial processing  
(oils, slurries). Dense suspensions are characterized by strong effects of  
15 particle interactions occurring at the microscopic level. The macroscopic re-  
sponse is determined by the microstructure dynamics of the particles and by  
the suspending fluid around them. Dense suspensions have negligible diffusive  
effects and multiple-body interactions contribute significantly to the rheology of  
the system. In particular, in many cases one can also observe non-Newtonian  
20 behaviors such as shear thinning, memory and first and second normal stress  
differences.

The rheology of the suspension in a non-Newtonian medium must be taken  
into account when one models applications as filled polymer processing, fiber  
extrusion, ceramic processing, drilling muds in oil recovery, slurry and oil trans-  
25 portation in pipelines. Studies on suspensions in non-Newtonian media are  
available in the literature, but the vast majority consider only homogeneous  
dilute/dense suspensions, [9]. In [10] the authors obtain a reliable prediction  
for the stress in a suspension of spherical particles in a viscoelastic fluid. Un-  
fortunately, the result is confined to a homogeneous suspension and to a linear  
30 velocity field. The extension of theoretical models to non-homogeneous sus-  
pensions is extremely important when modeling processes as the ones we have  
mentioned previously. The heterogeneity of the particles distribution may play  
a significant role in the dynamics of the system and transport mechanisms such  
as advection or diffusion of the solid particles must be taken into account.

35 In this paper we are interested in studying the linear stability of an isother-

mal dense suspension modeled as a upper convected Maxwell fluid flowing between parallel plates (Poiseuille flow). In particular, we investigate the stability assuming that the suspension is not homogeneous, i.e. the particle concentration may change in space and time. The rheological parameters in the constitutive equations are supposed to depend on the particles distribution, so that they are no longer constant. Since we are considering a dense suspension, we neglect diffusion and assume that the evolution of the particle density is governed by a simple transport equation. The linear stability of the Poiseuille flow of a dense Newtonian and generalized Newtonian suspension has been studied in [6], [7]. The present work can be seen as a follow up of the paper [13] in which the linear stability of an upper convected Maxwell fluid with constant rheology is investigated.

## 2. The mathematical model

We consider an inhomogeneous incompressible upper convected Maxwell fluid with constitutive equation given by (the starred quantities are dimensional)

$$\mathbf{T}^* + \lambda^*(\varphi) \overset{\nabla}{\mathbf{T}}^* = 2\mu^*(\varphi) \mathbf{D}^*, \quad (1)$$

where  $\varphi \in [0, 1]$  is the concentration (volume fraction) of the suspended particles in the fluid that does not affect the density, but whose variation strongly affects the rheology of the fluid (e.g. RBCs in blood flow). The quantities  $\lambda^*$ ,  $\mu^*$  are the relaxation time and the viscosity of the fluid respectively, both depending on  $\varphi$ . The tensor  $\mathbf{T}^*$  represents the deviatoric part of the Cauchy stress tensor  $\boldsymbol{\sigma}^* = -p^* \mathbf{I} + \mathbf{T}^*$ , where  $p^*$  is the Lagrange multiplier due to the incompressibility constraint (pressure). The upper convected time derivative is given by

$$\overset{\nabla}{\mathbf{T}}^* = \frac{\partial \mathbf{T}^*}{\partial t^*} + (\mathbf{v}^* \cdot \nabla^*) \mathbf{T}^* - \mathbf{L}^* \mathbf{T}^* - \mathbf{T}^* \mathbf{L}^{*T}, \quad (2)$$

where  $\mathbf{L}^* = \nabla^* \mathbf{v}^*$  and  $\mathbf{v}^*$  is the velocity field. In the absence of body forces the system is governed by

$$\begin{cases} \frac{\partial \varphi}{\partial t^*} + \mathbf{v}^* \cdot \nabla^* \varphi = 0, \\ \nabla^* \cdot \mathbf{v}^* = 0, \\ \rho^* \frac{D\mathbf{v}^*}{Dt^*} = -\nabla^* p^* + \nabla^* \cdot \mathbf{T}^*, \end{cases} \quad (3)$$

where  $\rho^*$  is the constant density of the fluid,  $D/Dt^*$  is material differentiation and  $\mathbf{T}^*$  is given by (1), (2). Equation (3)<sub>1</sub> represents the evolution equation of the particles concentration. Here we assume that the only transport mechanism is advection with no diffusive phenomena (dense suspension). The rheological parameters appearing in (1) depend on  $\varphi$  so that we can write

$$\lambda^*(\varphi) = \lambda_p^* \lambda(\varphi), \quad \mu^*(\varphi) = \mu_p^* \mu(\varphi), \quad (4)$$

where  $\lambda, \mu$  are positive smooth functions of  $\varphi$  such that  $\lambda(0) = \mu(0) = 1$  and where  $\lambda_p^*, \mu_p^*$  are the constant relaxation time and viscosity when  $\varphi = 0$  (zero particle concentration).

The system (3) is put in a dimensionless form scaling  $\mathbf{x}^*$  with  $L^*$ ,  $\mathbf{v}^*$  with  $U^*$ ,  $t^*$  with  $L^*U^{*-1}$ ,  $p^*$  with  $\rho^*U^{*2}$  and  $\mathbf{T}^*$  with  $\mu_p^*U^*L^{*-1}$ ,  $\mathbf{D}^*$  and  $\mathbf{L}^*$  with  $U^*L^{*-1}$ . The selection of the reference pressure is made to follow the one adopted in [13]. We find

$$\begin{cases} \frac{\partial \varphi}{\partial t} + \mathbf{v} \cdot \nabla \varphi = 0, \\ \nabla \cdot \mathbf{v} = 0, \\ \mathcal{R} \frac{D\mathbf{v}}{Dt} = -\mathcal{R} \nabla p + \nabla \cdot \mathbf{T}, \end{cases} \quad (5)$$

where  $\mathcal{R} = (\rho^*U^*L^*\mu_p^{*-1})$  is the Reynolds number. The dimensionless consti-

tutive equation becomes

$$\begin{cases} \mathbf{T} + \mathcal{W} \lambda(\varphi) \overset{\nabla}{\mathbf{T}} = 2\mu(\varphi) \mathbf{D}, \\ \overset{\nabla}{\mathbf{T}} = \frac{\partial \mathbf{T}}{\partial t} + (\mathbf{v} \cdot \nabla) \mathbf{T} - \mathbf{L} \mathbf{T} - \mathbf{T} \mathbf{L}^T, \end{cases} \quad (6)$$

where  $\mathcal{W} = (\lambda_p^* U^* L^{*-1})$  is the Weissenberg number. We observe that

$$\frac{\mathcal{W}}{\mathcal{R}} = \frac{\lambda_p^* \mu_p^*}{\rho^* L^{*2}} = \frac{\lambda_p^* \nu_p^*}{L^{*2}} = \frac{\lambda_p^*}{\lambda_k^*} = \mathcal{E}, \quad (7)$$

where  $\nu_p^*$  is the kinematic viscosity,  $\lambda_k^* = L^{*2}/\nu_p^*$  is the kinematical diffusion characteristic time and  $\mathcal{E}$  is the so-called “elasticity number”. From (7) we realize that  $\mathcal{E}$  is a non dimensional parameter that depends only on the material characteristics of the fluid and on the geometrical setting (not on the kinematics, i.e. not on  $U^*$ ). The Weissenberg number  $\mathcal{W} = (\lambda_p^* U^* L^{*-1})$ , on the other hand, depends on  $U^*$  and hence on the kinematics. This means that, when studying linear stability of shear flows where  $\mathcal{R} = (U^* L^* / \nu_p^*)$  is progressively increased to detect the critical Reynolds number that marks the appearance of unstable modes, the number  $\mathcal{W}$  cannot be treated as a fixed constant, unless we assume that the variation of  $\mathcal{R}$  is due to a change in the kinematic viscosity  $\nu_p^*$  and not in the characteristic velocity  $U^*$ . There are some works in which the marginal stability curves are computed assuming that  $\mathcal{W}$  and  $\mathcal{R}$  are independent, see [2], [8], [13], [14].

To better explain the relation between  $\mathcal{W}$  and  $\mathcal{R}$  let us consider the classical way in which marginal stability curves are obtained in 2D modal stability analysis for confined flows. The shear flow is perturbed by a disturbance in the form of a streamwise wave with velocity  $c \in \mathbb{C}$ , wave number  $\alpha$  and wave amplitude that depends on the transversal coordinate. The balance equations are then linearized and the system is reduced to an eigenvalue problem whose numerical solution provides a discrete set of complex eigenvalues for the selected pair  $(\mathcal{R}, \alpha)$ . The maximum of the imaginary part of the complex eigenvalues  $c_i(\mathcal{R}, \alpha)$ , which is clearly a function of  $\mathcal{R}$  and  $\alpha$ , is finally computed. If this value is negative the relative mode is stable, if it is positive the mode is unsta-

75 ble. The marginal stability curve is therefore the zero level set of the function  $c_i(\mathcal{R}, \alpha)$ , a curve that can be computed varying the Reynolds number  $\mathcal{R}$  and the wave number  $\alpha$  in the eigenvalue problem. If we take  $\mathcal{W}$  as a fixed constant in this process, then for each different  $\mathcal{R}$  we must have a different  $\mathcal{E}$  in order to ensure that  $\mathcal{W} = \mathcal{E} \mathcal{R} = \text{const.}$  This means that changing  $\mathcal{R}$  implies a change  
80 in  $\mathcal{E}$ , i.e. a change in the material properties of the fluid. In this paper we consider the case in which  $\mathcal{W}$  and  $\mathcal{R}$  are independent (and hence  $\mathcal{E}$  is not a fixed constant) and the case in which  $\mathcal{W}$  varies with  $\mathcal{R}$  (and hence  $\mathcal{E}$  is a fixed constant).

### 3. Basic solution

Let us consider the flow taking place in the layer  $y \in [-1, 1]$  (in dimensional variables  $[-L^*, L^*]$ ) driven by a known constant pressure gradient  $-G$  (the dimensional pressure gradient is thus  $G^* = \rho^* U^{*2} L^{*-1} G$ ). We impose no-slip boundary conditions  $\mathbf{v}|_{y=\pm 1} = 0$  on the plates and we look for a basic solution of the form

$$\mathbf{v}_o = u_o(y)\mathbf{i}, \quad \mathbf{T}_o = \mathbf{T}_o(y), \quad \varphi_o = \varphi_o(y), \quad p_o = p_o(x). \quad (8)$$

We note that a solution like (8) automatically satisfies equation (5)<sub>1</sub> and hence the quantity  $\varphi_o(y)$  is now a datum of the problem. For simplicity we assume that such a function is symmetric with respect to  $y = 0$  but minor changes allow to treat the non-symmetric case. We write

$$\lambda_o(y) = \lambda(\varphi_o(y)), \quad \mu_o(y) = \mu(\varphi_o(y)). \quad (9)$$

The only non-zero component of the tensor  $\mathbf{L}_o$  is  $(\mathbf{L}_o)_{12} = u'_o(y)$  (the prime denotes differentiation with respect to  $y$ ) and

$$\frac{\partial \mathbf{T}_o}{\partial t} = (\mathbf{v}_o \cdot \nabla) \mathbf{T}_o = 0. \quad (10)$$

Equations (5)<sub>1,2</sub> are automatically satisfied. On substituting (8)-(10) into (6) we find  $T_{13} = T_{23} = T_{22} = T_{33} = 0$  and

$$T_{11} = 2\mathcal{W} \lambda_o \mu_o u_o'^2, \quad T_{12} = \mu_o u_o'. \quad (11)$$

The momentum balance reduces to

$$-\mathcal{R} \frac{\partial p_o}{\partial x} = \frac{\partial}{\partial y} [\mu_o u'_o], \quad (12)$$

where  $p_o(x) = -Gx + \text{const.}$  Focusing only on the upper part of the channel we integrate (12) using the no-slip condition obtaining

$$u_o(y) = \int_y^1 \frac{\mathcal{R} G \eta}{\mu_o(\eta)} d\eta. \quad (13)$$

Selecting the reference velocity as

$$U^* = G^* \int_0^{L^*} \frac{\eta^*}{\mu_o^*(\eta^*)} d\eta^* \quad \left( \longrightarrow \quad 1 = \int_0^1 \frac{\mathcal{R} G \eta}{\mu_o(\eta)} d\eta \right), \quad (14)$$

the basic velocity in the upper layer (in the lower part the solution is symmetric) can be rewritten as

$$u_o(y) = \left( 1 - \frac{\int_0^y \frac{\eta}{\mu_o(\eta)} d\eta}{\int_0^1 \frac{\eta}{\mu_o(\eta)} d\eta} \right) \in [0, 1]. \quad (15)$$

85 We notice that (15) has a flex point only if there exists a  $\bar{y} \in (0, 1)$  such that  $\mu'_o(\bar{y})\bar{y} - \mu_o(\bar{y}) = 0$ . Therefore, whenever  $\mu_o$  is decreasing with  $y$  the basic profile is always concave.

**Remark 1.** *The basic solution (15) does not contain the relaxation function  $\lambda_o(y)$ . This means that when the steady-state is reached the elastic effects are*  
 90 *no longer observable and the flow is equivalent to the one of a linear fluid in which the viscosity depends on the volume fraction  $\varphi_o$ . Moreover, when  $\mu_o$  is constant we recover the classical parabolic profile of a viscous fluid.*

#### 4. Modal perturbation and Squire's theorem generalization

Let us consider the following 3D perturbation

$$\begin{aligned} \mathbf{v} &= \mathbf{v}_o(\mathbf{y}) + \hat{\mathbf{v}}(\mathbf{y})e^{i\alpha x + i\beta z + \sigma t}, & p &= p_o(x) + \hat{p}(\mathbf{y})e^{i\alpha x + i\beta z + \sigma t}, \\ \varphi &= \varphi_o(\mathbf{y}) + \hat{\varphi}(\mathbf{y})e^{i\alpha x + i\beta z + \sigma t}, & \mathbf{T} &= \mathbf{T}_o(\mathbf{y}) + \hat{\mathbf{T}}(\mathbf{y})e^{i\alpha x + i\beta z + \sigma t}, \end{aligned} \quad (16)$$



where  $(\cdot)$  are complex functions such that  $|(\cdot)| \ll 1$ ,  $\alpha$ ,  $\beta$  are the streamwise and the spanwise wave numbers and  $\sigma$  is the wave frequency. The velocity field is written component-wise as  $\mathbf{v} = (u, v, w)$ . Let us insert (16) into (5), (6) and linearize the equations. The equations for the transport of  $\varphi$  and for the mass balance become

$$\hat{\varphi}(\sigma + i\alpha u_o) + \varphi'_o \hat{v} = 0, \quad (17)$$

$$i\alpha \hat{u} + i\beta \hat{w} + \hat{v}' = 0. \quad (18)$$

For simplicity of notation we introduce  $\Upsilon = e^{i\alpha x + i\beta z + \sigma t}$ . To linearize the perturbed equation (6) we expand the functions  $\lambda$  and  $\mu$  around  $\varphi_o$  up to the first order

$$\lambda(\varphi) \cong \lambda(\varphi_o) + \left. \frac{d\lambda}{d\varphi} \right|_{\varphi_o} \hat{\varphi} \Upsilon =: \lambda_o(y) + \lambda_\varphi(y) \hat{\varphi} \Upsilon, \quad (19)$$

$$\mu(\varphi) \cong \mu(\varphi_o) + \left. \frac{d\mu}{d\varphi} \right|_{\varphi_o} \hat{\varphi} \Upsilon =: \mu_o(y) + \mu_\varphi(y) \hat{\varphi} \Upsilon. \quad (20)$$

The constitutive relation (6) becomes

$$\left( \mathbf{T}_o + \hat{\mathbf{T}} \Upsilon \right) + \mathcal{W} \left( \lambda_o + \lambda_\varphi \hat{\varphi} \Upsilon \right) \left( \overset{\nabla}{\mathbf{T}}_o + \overset{\nabla}{\hat{\mathbf{T}}} \Upsilon \right) = 2 \left( \mu_o + \mu_\varphi \hat{\varphi} \Upsilon \right) \left( \mathbf{D}_o + \hat{\mathbf{D}} \Upsilon \right). \quad (21)$$

Notice that the upper convected derivative is

$$\overset{\nabla}{(\cdot)} = \frac{\partial(\cdot)}{\partial t} + \left[ (\mathbf{v}_o + \hat{\mathbf{v}} \Upsilon) \cdot \nabla \right] (\cdot) - (\mathbf{L}_o + \hat{\mathbf{L}} \Upsilon) (\cdot) - (\cdot) (\mathbf{L}_o + \hat{\mathbf{L}} \Upsilon)^T, \quad (22)$$

so that linearization yields

$$\overset{\nabla}{\mathbf{T}}_o = (\hat{\mathbf{v}} \cdot \nabla) \mathbf{T}_o \Upsilon - (\mathbf{L}_o \mathbf{T}_o + \mathbf{T}_o \mathbf{L}_o^T) - (\hat{\mathbf{L}} \mathbf{T}_o + \mathbf{T}_o \hat{\mathbf{L}}^T) \Upsilon \quad (23)$$

and

$$\overset{\nabla}{\hat{\mathbf{T}}} \Upsilon = \sigma \hat{\mathbf{T}} \Upsilon + i\alpha u_o \hat{\mathbf{T}} \Upsilon - (\mathbf{L}_o \hat{\mathbf{T}} + \hat{\mathbf{T}} \mathbf{L}_o^T) \Upsilon. \quad (24)$$

Furthermore, it is easy to check that  $(\hat{\mathbf{v}} \cdot \nabla) \mathbf{T}_o = \hat{v} \mathbf{T}'_o$  so that inserting (23)-(24) into (21) and rearranging we find

$$\hat{\mathbf{T}} g - \mathcal{W} \lambda_o \left( \mathbf{L}_o \hat{\mathbf{T}} + \hat{\mathbf{T}} \mathbf{L}_o^T \right) = \mathcal{W} \lambda_\varphi \hat{\varphi} \left( \mathbf{L}_o \mathbf{T}_o + \mathbf{T}_o \mathbf{L}_o^T \right),$$

$$-\mathcal{W}\lambda_o\left[\hat{v}\mathbf{T}'_o - (\hat{\mathbf{L}}\mathbf{T}_o + \mathbf{T}_o\hat{\mathbf{L}}^T)\right] - 2\mu_\varphi\hat{\varphi}\mathbf{D}_o + 2\mu_o\hat{\mathbf{D}}, \quad (25)$$

where we have set

$$\sigma = -i\alpha c, \quad c \in \mathbb{C}, \quad g = \left[1 + \mathcal{W}\lambda_o i\alpha(u_o - c)\right]. \quad (26)$$

Equation (25) provides the link between the perturbed stress tensor  $\hat{\mathbf{T}}$  and the kinematics of the perturbation expressed in terms of  $\hat{\mathbf{v}}$ ,  $\hat{\mathbf{L}}$ ,  $\hat{\mathbf{D}}$ ,  $\hat{\varphi}$ . Notice that  $\hat{\varphi}$  can be expressed in terms of  $\hat{v}$  exploiting (17). Equation (25) is a linear system for the unknowns  $\hat{T}_{ij}(y)$  that can be easily solved, for instance, by simple Gaussian elimination. The tensor  $\hat{\mathbf{T}}$  is linear in  $\hat{\mathbf{v}}$  and in the first derivatives of  $\hat{\mathbf{v}}$ , with coefficients depending on  $y$  through the functions  $u_o$ ,  $\mu_o$ ,  $\lambda_o$  and their derivatives and through the basic flow. In the Appendix we have reported the exact expressions of the tensor components obtained from (25).

We now introduce the perturbed flow (16) into the momentum equation and linearize the system. We get

$$\begin{aligned} i\alpha(u_o - c)\hat{u} + u'_o\hat{v} &= -i\alpha\hat{p} + \frac{1}{\mathcal{R}}\left[i\alpha\hat{T}_{11} + \hat{T}'_{12} + i\beta\hat{T}_{13}\right], \\ i\alpha(u_o - c)\hat{v} &= -\hat{p}' + \frac{1}{\mathcal{R}}\left[i\alpha\hat{T}_{12} + \hat{T}'_{22} + i\beta\hat{T}_{23}\right], \\ i\alpha(u_o - c)\hat{w} &= -i\beta\hat{p} + \frac{1}{\mathcal{R}}\left[i\alpha\hat{T}_{13} + \hat{T}'_{23} + i\beta\hat{T}_{33}\right]. \end{aligned} \quad (27)$$

Substituting the expressions for  $\hat{T}_{ij}$  that are reported in the appendix into (27) we find

$$\begin{aligned} \mathcal{R}\left[i\alpha(u_o - c)\hat{u} + u'_o\hat{v}\right] &= -i\alpha\mathcal{R}\hat{p} + \left[\mathbf{L}_{\alpha,\mathcal{W}} - \frac{\mu_o(\alpha^2 + \beta^2)}{g}\right]\hat{u} + \\ &+ \left[\mathbf{M}_{\alpha,\mathcal{W}} + \left(\frac{i\alpha\mu'_o}{g} + \frac{\alpha^2\mu_o\lambda'_o\mathcal{W}(u_o - c)}{g^2} - (\alpha^2 + \beta^2)\frac{\mathcal{W}\lambda_o\mu_o u'_o}{g^2}\right)\right]\hat{v}, \end{aligned} \quad (28)$$

$$\mathcal{R}i\alpha(u_o - c)\hat{v} = \left[\mathbf{N}_{\alpha,\mathcal{W}} - \frac{\mu_o(\alpha^2 + \beta^2)}{g}\right]\hat{v}, \quad (29)$$

$$\begin{aligned} \mathcal{R} i\alpha(u_o - c)\hat{w} &= -i\beta\mathcal{R}\hat{p} + \left[ \mathbf{L}_{\alpha,\mathcal{W}} - \frac{\mu_o(\alpha^2 + \beta^2)}{g} \right] \hat{w} + \\ &+ \left( \frac{i\beta\mu'_o}{g} + \frac{\alpha\beta\mu_o\lambda'_o\mathcal{W}(u_o - c)}{g^2} \right) \hat{v}, \end{aligned} \quad (30)$$

where  $\mathbf{L}_{\alpha,\mathcal{W}}$ ,  $\mathbf{M}_{\alpha,\mathcal{W}}$ ,  $\mathbf{N}_{\alpha,\mathcal{W}}$  are the linear differential operators

$$\begin{aligned} \mathbf{L}_{\alpha,\mathcal{W}} &= \left( \frac{\mu_o}{g} \right) \mathbf{D}^2 + \left[ \left( \frac{\mu_o}{g} \right)' + \frac{i\alpha\mathcal{W}\lambda_o\mu_o u'_o}{g} + \frac{i\alpha\mathcal{W}\lambda_o\mu_o(1+g)u'_o}{g^2} \right] \mathbf{D} + \\ &+ \left[ \left( \frac{i\alpha\mathcal{W}\lambda_o\mu_o u'_o}{g} \right)' - \frac{\alpha^2\mathcal{W}^2\lambda_o^2\mu_o(2g+1)u_o'^2}{g^2} \right], \end{aligned} \quad (31)$$

$$\begin{aligned} \mathbf{M}_{\alpha,\mathcal{W}} &= \left( \frac{\lambda_o\mu_o\mathcal{W}u'_o}{g^2} \right) \mathbf{D}^2 + \left[ \frac{2i\alpha\mathcal{W}^2\lambda_o^2\mu_o(2+g)u_o'^2}{g^3} + \left( \frac{\mathcal{W}\lambda_o\mu_o(2+g)u'_o}{g^2} \right)' + \right. \\ &- \left. \frac{\mathcal{W}\lambda_o\mu_o g u_o'' - i\alpha\mathcal{W}^2\lambda_o^2\mu_o u_o'^2 + \mathcal{W}\lambda_o\mu'_o g u'_o - \mathcal{W}\lambda_o u'_o \varphi'_o \mu_\varphi}{g^2} - \frac{\mathcal{W}\lambda_o\mu_\varphi \varphi'_o \mu_\varphi}{g(g-1)} \right] \mathbf{D} + \\ &\left[ -\frac{2\mathcal{W}\lambda_o u'_o}{g^3} \left( i\alpha\mathcal{W}\lambda_o\mu_o g(2g+1)u_o'' + 2\alpha^2\mathcal{W}^2\lambda_o^2\mu_o(g+1)u_o'^2 + \right. \right. \\ &+ \left. \left. i\alpha\mathcal{W}g u'_o(\lambda_o(g+1)\mu'_o + \lambda'_o g \mu_o) \right) - \frac{2i\alpha\mathcal{W}^2\lambda_o\varphi'_o(\lambda\mu_\varphi + \lambda_\varphi g \mu_o)u_o'^2}{g^2(g-1)} + \right. \\ &\left. - \left( \frac{\mathcal{W}\lambda_o\mu_o g u_o'' - 2i\alpha\mathcal{W}^2\lambda_o^2\mu_o(g+1)u_o'^2 + \mathcal{W}\lambda_o\mu'_o g u'_o + \frac{\mathcal{W}\lambda_o\mu_\varphi \varphi'_o \mu_\varphi}{g(g-1)}}{g^2} \right)' \right], \end{aligned} \quad (32)$$

$$\begin{aligned} \mathbf{N}_{\alpha,\mathcal{W}} &= \left( \frac{\mu_o}{g} \right) \mathbf{D}^2 + \left[ \left( \frac{2\mu_o}{g} \right)' + \frac{2i\alpha\mathcal{W}\lambda_o\mu_o(1+g)u'_o}{g^2} \right] \mathbf{D} + \left[ \left( \frac{2i\alpha\mathcal{W}\lambda_o\mu_o u'_o}{g} \right)' + \right. \\ &- \left. \frac{i\alpha\mathcal{W}\lambda_o\mu_o g u_o'' + 2\alpha^2\mathcal{W}^2\lambda_o^2\mu_o(g+1)u_o'^2 + i\alpha\mathcal{W}\lambda_o\mu'_o g u'_o - \frac{i\alpha\mathcal{W}\mu_\varphi u'_o \varphi'_o \lambda_o}{g(g-1)}}{g^2} \right], \end{aligned}$$

where  $\mathbf{D} = d/dy$ . We now define the following Squire's transformation

$$\bar{\alpha}^2 = \alpha^2 + \beta^2, \quad \bar{\alpha}\bar{u} = \alpha\hat{u} + \beta\hat{w}, \quad \bar{c} = c, \quad \bar{v} = v, \quad (33)$$

$$\bar{\alpha}\bar{\mathcal{W}} = \alpha\mathcal{W}, \quad \bar{\alpha}\bar{\mathcal{R}} = \alpha\mathcal{R}, \quad \bar{\mathcal{R}}\bar{p} = \mathcal{R}\hat{p} \quad (34)$$

and we notice that

$$\mathbf{L}_{\alpha,\mathcal{W}} = \mathbf{L}_{\bar{\alpha},\bar{\mathcal{W}}}, \quad \alpha\mathbf{M}_{\alpha,\mathcal{W}} = \bar{\alpha}\mathbf{M}_{\bar{\alpha},\bar{\mathcal{W}}}, \quad \mathbf{N}_{\alpha,\mathcal{W}} = \mathbf{N}_{\bar{\alpha},\bar{\mathcal{W}}}.$$

Let us now multiply equation (28) by  $i\alpha$ , equation (30) by  $i\beta$  and then add the two equations. The system (28)-(30) reduces to

$$\begin{aligned} \bar{\mathcal{R}} \left[ i\bar{\alpha}(u_o - \bar{c})\bar{u} + u'_o\bar{v} \right] &= -i\bar{\alpha}\bar{\mathcal{R}}\bar{p} + \left[ \mathbf{L}_{\bar{\alpha},\bar{\mathcal{W}}} - \frac{\bar{\alpha}^2\mu_o}{g} \right] \bar{u} + \\ &+ \left[ \mathbf{M}_{\bar{\alpha},\bar{\mathcal{W}}} + \left( \frac{i\bar{\alpha}\mu'_o}{g} + \frac{\bar{\alpha}^2\mu_o\lambda'_o\bar{\mathcal{W}}(u_o - \bar{c})}{g^2} - \bar{\alpha}^2\frac{\bar{\mathcal{W}}\lambda_o\mu_o u'_o}{g^2} \right) \right] \bar{v}, \end{aligned} \quad (35)$$

$$\bar{\mathcal{R}} i\bar{\alpha}(u_o - \bar{c})\bar{v} = \left[ \mathbf{N}_{\bar{\alpha},\bar{\mathcal{W}}} - \frac{\mu_o\bar{\alpha}^2}{g} \right] \bar{v}. \quad (36)$$

The system (35)-(36) has the same structure of the system (28)-(30) with  $w = \beta = 0$ . The classical no-slip boundary conditions are transformed accordingly to the Squire's transformation (33)-(34). Thus, we have proved the following:

**Theorem 1. (Squire)** *In the case of non constant relaxation time and molecular viscosity, if a three-dimensional mode is unstable, a two-dimensional mode is unstable at a lower Reynolds number.*

We recall that the validity of Squire's theorem for constant  $\lambda$  and  $\mu$  was proved in [13]. As a consequence, it follows that for the study of linear modal stability it is sufficient to consider only a two dimensional perturbation, which shall lead to a generalization of the Orr-Sommerfeld equation.

**Remark 2.** *We believe that the substitution of the rate-type model with one based on a different objective time derivative (e.g. Jaumann or Oldroyd) does not invalidate Squire's theorem. The type of calculations leading to (35)-(36) remains essentially the same, so we expect that Squire's theorem remains valid also for other rate-type models. Of course, this is true as long as the rheological*

parameters do not depend on the strain rate. Indeed, when this is the case it  
 120 is sufficient to consider the constant power law model (which can be obtained  
 setting the relaxation time to zero and assuming that the viscosity is a function  
 of the second invariant of the strain-rate only) for which Squire theorem does  
 not hold, [5].

## 5. Generalized Orr-Sommerfeld equation

We consider the perturbation (16) with  $\beta = w = 0$ . In this case  $\hat{T}_{13} =$   
 $\hat{T}_{23} = \hat{T}_{33} = 0$  and the system reduces to (27)<sub>1,2</sub>, in which we set  $\beta = w = 0$ .  
 Eliminating the pressure and recalling that  $\hat{v}' = -i\alpha\hat{u}$  we find

$$-\mathcal{R} \left[ (u_o - c)(\mathbf{D}^2 - \alpha^2) - u_o'' \right] \hat{v} = \left[ i\alpha\mathbf{D}(\hat{T}_{11} - \hat{T}_{22}) + (\mathbf{D}^2 + \alpha^2)\hat{T}_{12} \right]. \quad (37)$$

125 Substituting the expressions for the stress components (with  $\beta = w = 0$  and  
 with  $\hat{v}' = -i\alpha\hat{u}$ ) given in the appendix we get a polynomial eigenvalue problem  
 of the type

$$\mathcal{L}\hat{v} = 0,$$

where  $\mathcal{L}_j$  are the differential operators

$$\mathcal{L} = \sum_{m=0}^5 \mathcal{L}_m c^m, \quad \mathcal{L}_j = \sum_{k=0}^4 L_{jk}(y) \mathbf{D}^k \quad (38)$$

and where  $L_{jk}(y)$  are coefficients depending on the basic solution, the Weis-  
 senberg and Reynolds numbers and on the wave number  $\alpha$ .

### 130 5.1. Constant coefficients

As a benchmark problem we consider the one in which  $\varphi_o = 0$  (no dispersed  
 particles), which implies  $\lambda_o = \mu_o = 1$ ,  $\varphi_o' = 0$ . This is exactly the case in-  
 vestigated in [13]. Exploiting the expressions of the stress components with  
 $\beta = w = 0$  given in the appendix and substituting into (37) we find:

$$i\alpha g \mathcal{R} \left[ (u_o - c)(\mathbf{D}^2 - \alpha^2) - u_o'' \right] \hat{v} = \mathbf{D}^4 \hat{v} + b_3(y) \mathbf{D}^3 \hat{v} + b_2(y) \mathbf{D}^2 \hat{v} + b_1(y) \mathbf{D} \hat{v} + b_o(y), \quad (39)$$

which is equal to equation (15) of [13] and where the basic velocity profile (15) is now  $u_o(y) = 1 - y^2$ . The no-slip condition implies  $\hat{v}(\pm 1) = D\hat{v}(\pm 1) = 0$  while the coefficients  $b_j(y)$  are given by

$$\begin{aligned}
b_3(y) &= 2g' \left(1 - \frac{1}{g}\right), & b_2(y) &= -2\alpha^2 + 3g'' \left(1 - \frac{1}{g}\right) + 2g'^2 \left(1 - \frac{1}{g}\right)^2, \\
b_1(y) &= -2\alpha^2 g' \left(1 - \frac{1}{g}\right) + 2g''' \left(1 - \frac{1}{g}\right) + 4g'g'' \left(1 - \frac{1}{g}\right)^2 - \frac{4g^3}{g} \left(1 - \frac{1}{g}\right), \\
b_o(y) &= \alpha^4 + g^{(iv)} - \alpha^2 g'' \left(1 - \frac{1}{g}\right) - 2\alpha^2 g'^2 \left(1 + \frac{1}{g^2}\right) - 4\frac{g'g'''}{g} - \frac{3g''^2}{g} \\
&+ \frac{4g'^4}{g^2} - \frac{6g'^2 g''}{g} \left(1 - \frac{1}{g}\right).
\end{aligned}$$

We recall that the quantity  $g$  is given by (26). The coefficients above present some differences if compared to those of [13]. Indeed, the  $b_j(y)$  determined in [13] are not correct and this can be easily proved deriving the perturbation equation and exploiting equations (10), (11) of [13]. The correctness of the  
135 coefficients presented here has also been checked using the symbolic software wxMaxima. Problem (39) is solved using a spectral collocation method based on Chebyshev modes [11].

In Fig. 1a, 1b we show the marginal stability curves obtained solving the eigenvalue problem (39) numerically and considering  $\mathcal{W}$  and  $\mathcal{R}$  as independent  
140 ( $\mathcal{E}$  is thus not a fixed constant). Because of the discrepancy in the coefficients we obtain curves that are slightly different from the one of [13]. Looking at Fig. 1a we observe that the increase of the Weissenberg number has a destabilizing effect, since the critical Reynolds number is reduced when  $\mathcal{W}$  is increased. From Fig. 1b we see that the increase of the Reynolds number results in a decrease of  
145 the critical Weissenberg number. In Fig. 2a, 2b we show the marginal stability curves in the plane  $(\mathcal{R}, \alpha)$  and in the plane  $(\mathcal{W}, \alpha)$  assuming that  $\mathcal{E}$  is a fixed constant. In this case  $\mathcal{W}$  and  $\mathcal{R}$  are not independent. As one can see the critical Reynolds number is a decreasing function of  $\mathcal{E}$ , while the critical Weissenberg

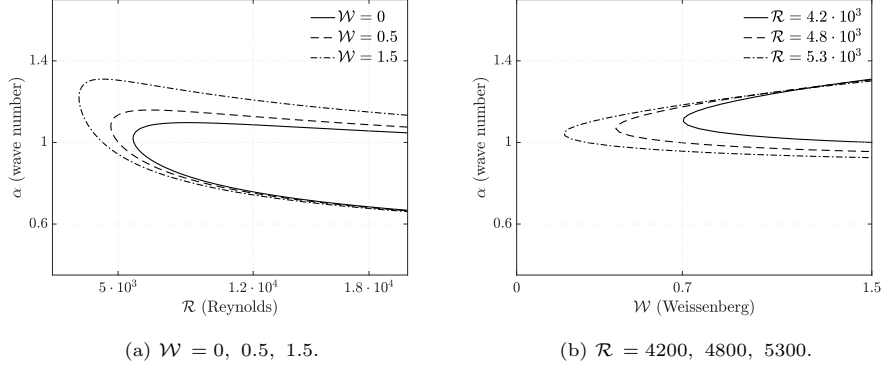


Figure 1: Marginal stability curves for  $\lambda_o = \mu_o = 1$ ,  $\varphi'_o = 0$ ,  
( $\mathcal{W}$  independent of kinematics).

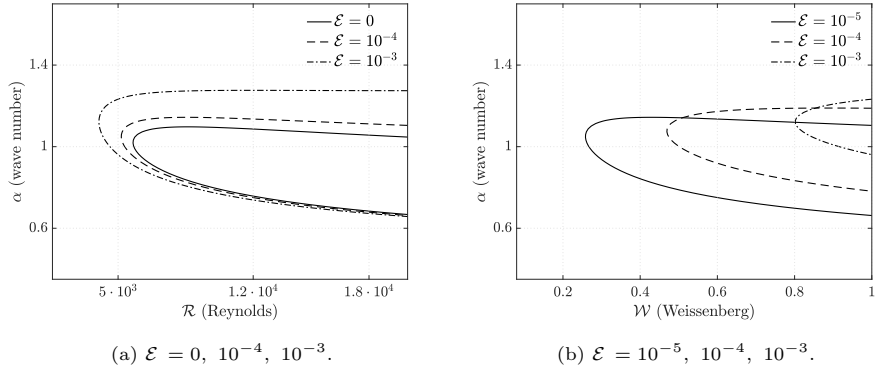


Figure 2: Marginal stability curves for  $\lambda_o = \mu_o = 1$ ,  $\varphi'_o = 0$ ,  
( $\mathcal{W}$  dependent on kinematics).

number is an increasing function of  $\mathcal{E}$ . We may conclude that the increase of  
 150 the relaxation time  $\lambda_p^*$  (i.e. the time needed to gradually release the stress in  
 the fluid) or reduction of the kinematical diffusion time  $\lambda_k^*$  has a destabilizing  
 effect on the flow.

### 5.2. Low Weissenberg number

In this section we investigate the general 2D problem with non constant  
 155 coefficients. Due to the remarkable complexity of this problem we limit ourselves  
 to consider the case in which the Weissenberg number is “small” and in which  
 the quantities  $\mu'_o u'_o$ ,  $\lambda'_o u'_o$  are negligible. In practice we linearize the components  
 of the stress tensor given in the appendix around  $\mathcal{W} = 0$  so that

$$\begin{aligned}\hat{T}_{11} &= - \left[ \frac{4\lambda_o\mu_o u'_o \mathcal{W}}{i\alpha} \right] \mathbb{D}^2 \hat{v} - \left[ \frac{2i\alpha\mu_o + 2\lambda_o\alpha^2\mu_o(u_o - c)\mathcal{W}}{i\alpha} \right] \mathbb{D} \hat{v} \\ &\quad + \left[ \frac{2i(\lambda_o\mu'_o u'_o + \lambda'_o u'_o \mu_o) u'_o}{\alpha(u_o - c)} + 2i\alpha\lambda_o\mu_o u'_o \right] \mathcal{W} \hat{v}, \\ \hat{T}_{12} &= - \left[ \frac{\mu_o - i\alpha\lambda_o\mu_o(u_o - c)\mathcal{W}}{i\alpha} \right] \mathbb{D}^2 \hat{v} + \left[ 3\lambda_o\mu_o u'_o \mathcal{W} - \frac{i\alpha\lambda_o\mu_o u'_o \mathcal{W}}{i\alpha} \right] \mathbb{D} \hat{v} \\ &\quad \left[ \left( \frac{i\mu'_o u'_o}{\alpha(u_o - c)} + i\alpha\mu_o \right) + \left( -\lambda_o\mu_o u''_o + \lambda_o\alpha^2\mu_o(u_o - c) \right) \mathcal{W} \right] \hat{v}, \\ \hat{T}_{22} &= \left[ 2\mu_o - 2i\alpha\lambda_o\mu_o(u_o - c)\mathcal{W} \right] \mathbb{D} \hat{v} + \left[ 2i\alpha\lambda_o\mu_o u'_o \mathcal{W} \right] \hat{v}.\end{aligned}$$

We see that the presence of the term  $\alpha(u_o - c)$  at the denominator introduces  
 a possible singularity in the perturbed stress components. As observed in [4],  
 the singular factor is essentially due to the nature of the transport equation for  
 the particle concentration (transport equation (17) with no diffusion, infinite  
 Péclet number). Although the absence of diffusion allows one to consider any  
 arbitrary even function  $\varphi_o(y)$  as the base particle distribution, the transport  
 equation introduces the possible singularity in the perturbation equation. In



[6], [7] we have proved that, for a Newtonian suspension and for a generalized Newtonian suspension, the absence of diffusion is responsible for unconditional instability, i.e. unstable modes exist for all  $\mathcal{R}$ . Here the situation is analogous, i.e. using the expressions that contain the singular factor  $\alpha(u_o - c)$  in the perturbation equation (37) we end up finding unstable modes for each choice of  $\mathcal{R}$ . On the other hand, if we neglect the singular terms, which is possible only if  $\mu'_o u'_o$ ,  $\lambda'_o u'_o$  are “sufficiently small”, we may determine stability regions and neutral stability curves. So let us suppose to neglect all the terms containing  $\alpha(u_o - c)$  in the stress components above and insert the latter into (37). We end up with the following eigenvalue problem

$$\left[ c\mathbf{A} + \mathbf{B} \right] \hat{v} = 0, \quad (40)$$

where

$$\begin{aligned} \mathbf{A} &= \left[ \alpha \lambda_o \mu_o \mathcal{W} \right] \mathbf{D}^4 + \left[ 2\alpha (\lambda_o \mu_o)' \mathcal{W} \right] \mathbf{D}^3 + \left[ \alpha (\lambda_o \mu_o)'' \mathcal{W} - 2\alpha^3 \lambda_o \mu_o \mathcal{W} + \alpha \mathcal{R} \right] \mathbf{D}^2 + \\ &\quad - \left[ 2\alpha^3 (\lambda_o \mu_o)' \mathcal{W} \right] \mathbf{D} + \left[ \alpha^3 (\lambda_o \mu_o)'' \mathcal{W} + \alpha^5 \lambda_o \mu_o \mathcal{W} - \alpha^3 \mathcal{R} \right], \\ \mathbf{B} &= \left[ -\alpha \lambda_o \mu_o u_o \mathcal{W} - i \mu_o \right] \mathbf{D}^4 + \left[ -2\alpha (\lambda_o \mu_o)' u_o \mathcal{W} - 2i \mu'_o \right] \mathbf{D}^3 + \\ &\quad \left[ -2\alpha u'_o (\lambda_o \mu_o)' \mathcal{W} - \alpha (\lambda_o \mu_o)'' u_o \mathcal{W} + 2\alpha^3 \lambda_o \mu_o u_o \mathcal{W} - \alpha u_o \mathcal{R} - i u''_o + 2i \alpha^2 \mu_o \right] \mathbf{D}^2 + \\ &\quad \left[ -2\alpha (u'_o \lambda_o \mu_o)' \mathcal{W} + 2\alpha^3 u_o (\lambda_o \mu_o)' \mathcal{W} + 2i \alpha^2 \mu'_o \right] \mathbf{D} + \\ &\quad \left[ \alpha (\lambda_o \mu_o u''_o)'' \mathcal{W} + (u''_o + \alpha^3 u_o) \mathcal{R} - 2\alpha^3 u'_o (\lambda_o \mu_o)' \mathcal{W} - \alpha^3 u_o (\lambda_o \mu_o)'' \mathcal{W} + \right. \\ &\quad \left. - \alpha^5 \lambda_o \mu_o u_o \mathcal{W} - i \alpha^2 \mu''_o - i \alpha^4 \mu_o \right]. \end{aligned}$$

We consider the following non-constant functions  $\mu_o(y)$  and  $\lambda_o(y)$

$$\mu_o(y) = 1 + \delta y^2, \quad \lambda_o(y) = 1 + \delta y^2, \quad (41)$$

for  $\delta = -0.05, 0, 0.05, 0.1$ . This choice, that is not dictated by any specific practical application, allows us to investigate how stability is influenced by the basic particle distribution across the channel. In particular we shall see that the most stable flows are the ones in which the concentration of solid particles

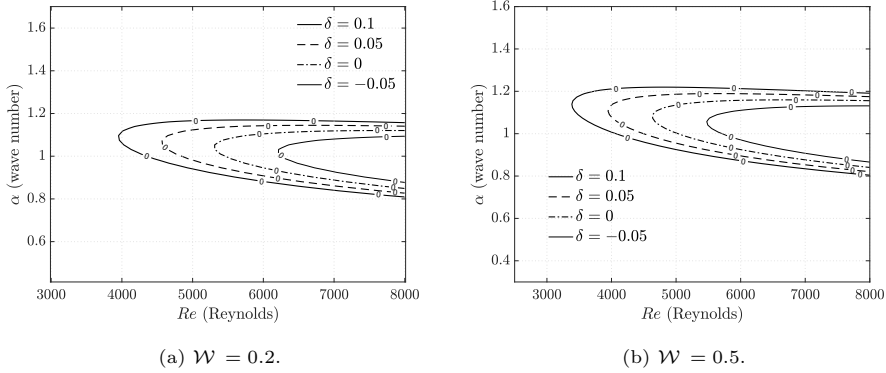


Figure 3: Marginal stability curves for  $\lambda_o$ ,  $\mu_o$  given by (41).  
 $\mathcal{W}$  independent of  $\mathcal{R}$  (varying  $\mathcal{E}$ ).

is reduced towards the channel walls. Once again, we solve problem (40) numerically using a spectral collocation method based on Chebyshev modes [11] and we plot the neutral stability curves for different values of the Weissenberg number. As done in the previous section, we treat the cases  $\mathcal{W}$  independent and dependent of  $\mathcal{R}$  separately. In Fig. 3 we plot the marginal stability curves for  $\mathcal{W}$  independent of  $\mathcal{R}$  with the material coefficients given in (41) for different values of  $\delta$  and for  $\mathcal{W} = 0.2, 0.5$ . In both cases the decrease of the coefficient  $\delta$  results in an increase of the critical Reynolds number, indicating that flows in which the particle distribution is increasing towards the wall are less stable than the ones in the opposite case. This type of behavior is in accordance with the one observed in [6] and [7], where it was shown that flows with larger particle concentration in the center of the channel are more stable than the ones in which the larger concentration is near the wall. Finally, as observed in the constant case, we note that the Weissenberg number has a destabilizing effect on the flow, as the critical Reynolds number is reduced for larger  $\mathcal{W}$ . In Figs 4 we plot the neutral stability curves assuming that  $\mathcal{W}$  depends on  $\mathcal{R}$  and we use  $\mathcal{E}$  as a variable parameter. Looking at Fig. 4b, 4a we observe that the reduction of  $\delta$  produces an increase of the critical Reynolds number, thus enhancing stability. Further, we see that, for a fixed  $\delta$ , a lower  $\mathcal{E}$  results in a smaller value of the

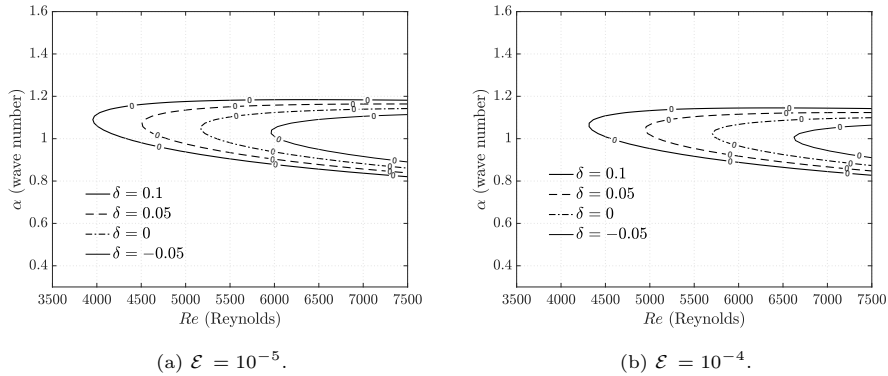


Figure 4: Marginal stability curves for  $\lambda_o$ ,  $\mu_o$  given by (41).  $\mathcal{W} = \mathcal{E} \mathcal{R}$ .

critical Reynolds number, showing once again that the flow is more stable for larger values of  $\mathcal{E}$  (i.e. for larger values of the ratio between the relaxation time and the characteristic time of kinematical diffusion).

## 185 6. Conclusions

We study the linear stability of an isothermal non-homogeneous dense suspension flowing between parallel plates (Poiseuille flow). The suspension is modeled as a viscoelastic upper convected Maxwell fluid with rheological parameters depending on the particles concentration. The density of the particles  
190 evolves according to a transport equation with negligible diffusion.

We determine the basic unidirectional flow driven by a given pressure gradient and we perturb such a flow with a three dimensional wave-like disturbance, proving the validity of Squire's theorem (in the case of non constant relaxation time and molecular viscosity). The latter allows us to consider only a two-  
195 dimensional perturbation in the stream-wise direction. In this case the problem reduces to a generalization of the Orr-Sommerfeld equation which we solve numerically via a spectral collocation method based on Chebyshev polynomials. As a benchmark problem we initially study the case with constant rheological moduli, showing the agreement with the results of [13]. Subsequently we  
200 consider the case of low Weissenberg number and non constant parameters.

We distinguish between two different situations: i) the Weissenberg number  $\mathcal{W}$  and the Reynolds number  $\mathcal{R}$  are independent ( $\mathcal{W}$  does not depend on the kinematics); ii) the Weissenberg number  $\mathcal{W}$  and the Reynolds number  $\mathcal{R}$  are dependent. In our opinion hypothesis i) is less significant from a physical stand-point since it implies that a change in the Reynolds number is due to a variation of the material properties of the fluid. We show that flows in which the particle distribution is concentrated in the proximity of the channel walls are less stable than those showing opposite behavior. This latter result is in line with the findings of [6] and [7].

The tensor components obtained solving the linear system (25) are

$$\hat{T}_{11} = \left[ \frac{2\lambda_o \mathcal{W} (1+g) \mu_o u'_o}{g^2} \right] \mathbb{D}\hat{u} + \left[ \frac{2\lambda_o^2 \mathcal{W}^2 (2+g) \mu_o u_o'^2}{g^3} \right] \mathbb{D}\hat{v} \\ + \left[ \frac{2i\alpha\mu_o (\lambda_o^2 \mathcal{W}^2 (2g+1) u_o'^2 + g)}{g^2} \right] \hat{u} + \mathcal{H}_{11} \hat{v},$$

$$\hat{T}_{12} = \left[ \frac{\mu_o}{g} \right] \mathbb{D}\hat{u} + \left[ \frac{\lambda_o \mathcal{W} (2+g) \mu_o u'_o}{g^2} \right] \mathbb{D}\hat{v} + \left[ \frac{i\lambda_o \mathcal{W} \alpha \mu_o u'_o}{g} \right] \hat{u} + \mathcal{H}_{12} \hat{v},$$

$$\hat{T}_{13} = \left[ \frac{\lambda_o \mathcal{W} (g+1) \mu_o u'_o}{g^2} \right] \mathbb{D}\hat{w} + \left[ \frac{i\beta\mu_o}{g} \right] \hat{u} + \left[ \frac{i\lambda_o \mathcal{W} \beta \mu_o u'_o}{g^2} \right] \hat{v} \\ + \left[ \frac{i\alpha\mu_o (\lambda_o^2 \mathcal{W}^2 (2g+1) u_o'^2 + g)}{g^2} \right] \hat{w},$$

$$\hat{T}_{22} = \left[ \frac{2\mu_o}{g} \right] \mathbb{D}\hat{v} + \left[ \frac{2i\lambda_o \mathcal{W} \alpha \mu_o u'_o}{g} \right] \hat{v},$$

$$\hat{T}_{23} = \left[ \frac{\mu_o}{g} \right] \mathbb{D}\hat{w} + \left[ \frac{i\beta\mu_o}{g} \right] \hat{v} + \left[ \frac{i\lambda_o \mathcal{W} \alpha \mu_o u'_o}{g} \right] \hat{w},$$

$$\hat{T}_{33} = \left[ \frac{2i\beta\mu_o}{g} \right] \hat{w},$$

where

$$\mathcal{H}_{11} = - \left[ \lambda_o \mathcal{W} g (2g+1) \mu_o u_o'' - 2i\alpha \lambda_o^2 \mathcal{W}^2 (g+1) \mu_o u_o'^2 + \right. \\ \left. + \mathcal{W} g u'_o (\lambda_o (g+1) \mu'_o + \lambda'_o g \mu_o) - i\alpha g \mu_o \right] \left( \frac{2\lambda_o \mathcal{W} u'_o}{g^3} \right) - \frac{2\lambda_o \mathcal{W}^2 \varphi'_o (\lambda_o \mu_\varphi + \lambda_\varphi g \mu_o) u_o'^2}{g^2 (g-1)},$$

$$\mathcal{H}_{12} = \left[ \frac{-\lambda_o \mathcal{W} g \mu_o u_o'' + 2i\alpha \lambda_o^2 \mathcal{W}^2 (g+1) \mu_o u_o'^2 - \lambda_o \mathcal{W} g \mu'_o u'_o}{g^2} + \frac{i\alpha \mu_o}{g} \right] - \frac{\lambda_o \mathcal{W} \varphi'_o \mu_\varphi u'_o}{g(g-1)}.$$

We recall that the function  $g$  is given by

$$g = \left[ 1 + \mathcal{W} \lambda_o i \alpha (u_o - c) \right].$$

## Acknowledgments

This research was partially supported by GNFM of Italian INDAM.

## References

- [1] Bergenholtz J., Brady J.F., Vicic M., The non-Newtonian rheology of dilute  
215 colloidal suspensions. *J. Fluid Mech.*, 456, (2002), 239–275.
- [2] Cousins R.R., Three-dimensional stability analysis of plane Poiseuille flow  
in slightly viscoelastic fluids, *Int. J. Eng. Sci.*, 8, (1970), 5095–607.
- [3] Einstein A., Eine neue Bestimmung der Molekuldimension, *Annalen der  
Physik*, 19, (1906), 289.
- 220 [4] Ern P., Charru F., Luchini P., Stability analysis of a shear flow with  
strongly stratified viscosity, *J. Fluid Mech.*, 496, (2003), 295–312.
- [5] Georgievskii D.V., Applicability of the squire transformation in linearized  
problems on shear stability, *Russian Journal of Mathematical Physics*, 16,  
(2009), 478–483.
- 225 [6] Fusi L., Farina A., Linear stability analysis of blood flow in small vessels,  
*Applications of Engineering Science*, 1, 100002, (2020).
- [7] Fusi L., Farina A., Saccomandi G., Linear stability analysis of the Poiseuille  
flow of a stratified non-Newtonian suspension: application to microcircula-  
tion, *Journal of Non-Newtonian Fluid Mechanics*, 287, 104464, (2021).
- 230 [8] Ho T.C., Denn M., Stability of plane Poiseuille flow of a highly elastic  
liquid, *J. Non-Newt. Fluid Mech.*, 3,2, (1977), 179–195.
- [9] Jarzebsky G.J., On the effective viscosity of pseudoplastic suspensions,  
*Rheol. Acta*, 20, (1981), 280–287.
- [10] Koch D.L., Subramanian G., The stress in a dilute suspension of spheres  
235 suspended in a second-order fluid subject to a linear velocity field, *J. Non-  
Newtonian Fluid Mech.*, 138, (2006), 87–97.

- [11] Schmid P.J., Henningson D.S., *Stability and transition in shear flows*, Springer (2001).
- [12] Stickel J.J., Powell R.L., Fluid mechanics and rheology of dense suspen-  
240 sions, *Annu. Rev. Fluid Mech.*, **37**, (2005), 129–149.
- [13] G. Tlapa, B. Bernstein, Stability of relaxation-type viscoelastic fluid with  
slight elasticity, *Phys. Fluids.*, **13**, (1970), 565–567.
- [14] Zhang M., Lashgari I., Zaki T.A., Brandt L., Linear stability analysis of  
245 channel flow of viscoelastic Oldroyd-B and FENE-P fluids, *J. Fluid Mech.*,  
737, (2013), 249–279.